

This is the 3rd step.

It should be noted if you are removing the binnacle only you can complete this step without completing step 2 (Removing the passenger airbag panel).

There are only two screws to remove in this step. They are 3mm Allen heads of the same length and are located on either side of the tachometer in the upper part of the instrument cluster.

After the screws are removed it is a friction fit that requires a firm pull towards you as you sit in the drivers seat. The pull should be firm and with control as if you pull and loose control clip D can scratch the Left Hand vent. Tape over the vent would be a good idea.

Pins 1 and 2 do not clip but are alignment only.

Clips A through C are somewhat strong and clip well. Clip D kind of hangs out there with not much strength.

Tips for Installation-

Make sure Clips A through C are properly engaged. You will need to hold downward pressure on these areas as you slowly slide forward towards the windshield. Tape over the top of the dash would be a good idea as to not scratch anything as it becomes a tight fit the closer it gets to the final resting place. Watch clip D for engagement as it can easily slide up too high and miss the male mating portion. The screws will go in easily once it is fully engaged in the clips.

Pin 1

Clip A

Screw 20

Clip B

249886

24

Screw 22

Clip C

Pin 2

Clip D

Pic. #1




Clip B Clips Here



Pic. #2

Clip C goes here

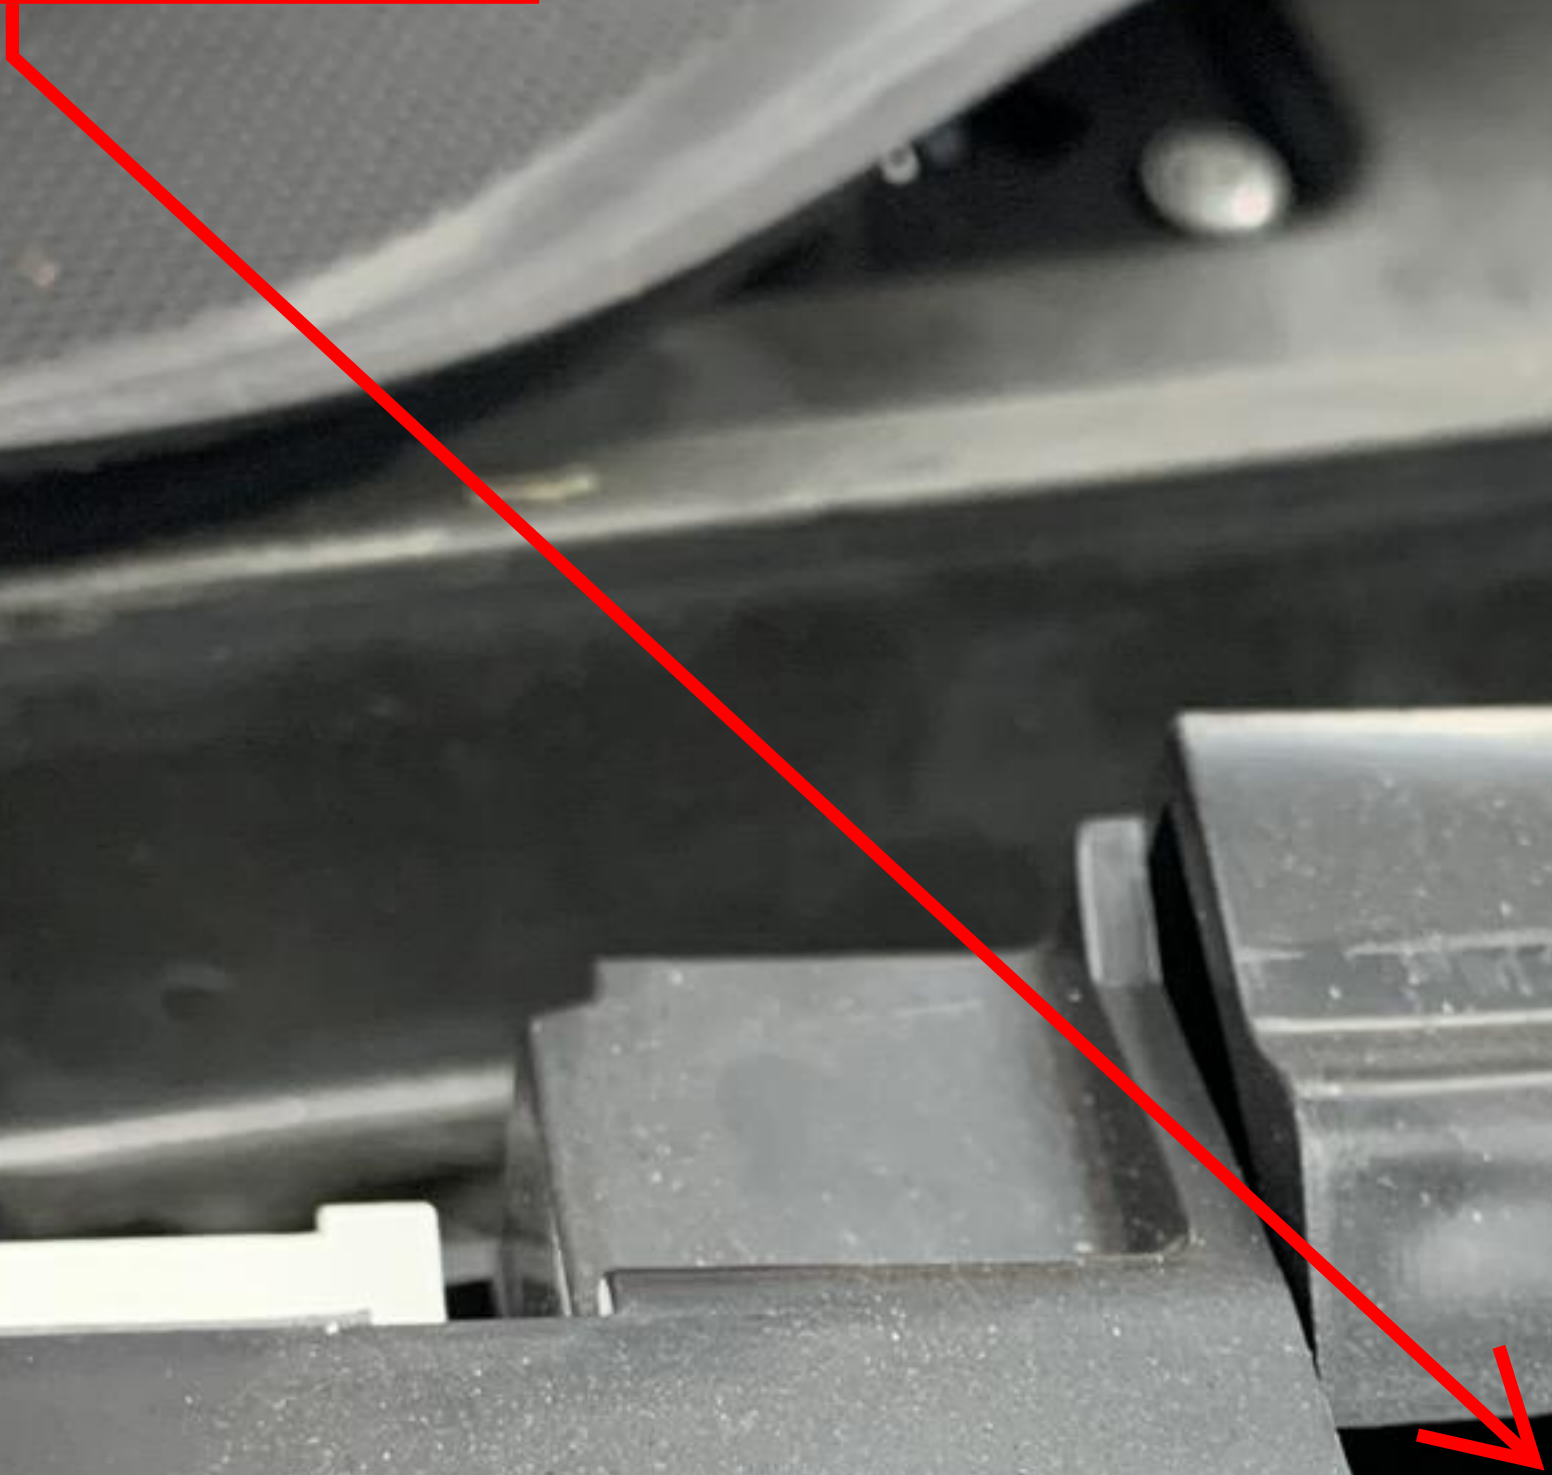

Pic. #3

Clip A goes here



Pic. #4



Clip D goes here

Pic. #5



Pin 1 Goes here. It is alignment and does not snap in

Pic. #6

Pin 2 Goes here. It is alignment and does not snap in



Pic. #7





Screw 20 Top View

Screw 21 Top View



Screw 21 location  
looking up

Pic. #9



Screw 20 location  
looking up

Pic. #10